



Plusline Compact

Plusline C 150W R7s 240V 1BC

Mains-voltage linear lamp giving white halogen light

Product data

• General Characteristics

Cap-Base	R7s
Cap-Base Information	10
Bulb	T3 [T 12mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 50% failures	2000 hr
Nominal Lifetime	2000 hr
Rated Lifetime (hours)	2000 hr

• Light Technical Characteristics

Color Rendering Index	100 Ra8
Luminous flux lamp	2400 Lm
Luminous Efficacy Lamp	16 Lm/W

• Electrical Characteristics

Lamp Wattage	150 W
Lamp Wattage Technical	150 W
Voltage	240 V
Lamp Current	0.63 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	D
-------------------------------	---

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	900 (max) C

• Product Dimensions



Insertion Length B	73.3 (min), 74.9 (nom), 76.5 (max) mm
Overall Length C	78.3 (max) mm
Diameter D	15 (max) mm

• Product Data

Order code	923919945792
Full product code	923919945792
Full product name	Plusline C 150W R7s 240V 1BC
Order product name	Plusline C 150W R7s 240V 1BC/10
Pieces per pack	1
Packing configuration	10
Packs per outerbox	10
Bar code on pack - EAN1	8711500901743
Bar code on outerbox - EAN3	8711500901798
Logistic code(s) - 12NC	923919945792
ILCOS code	HDG//RS-150-240-R7s-74,9
Net weight per piece	0.008 kg

PHILIPS

Dimensional drawing

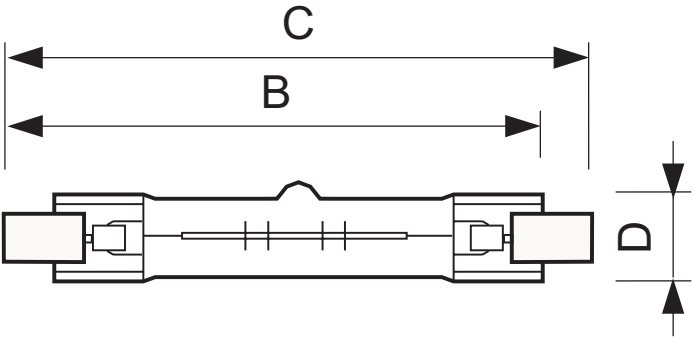

R7s

Plusline C 150W R7s 240V 1BC

Product	B (Min)	B (Norm)	B (Max)	C (Max)	D (Max)
DEComp 150W R7s 240V T3 CL	73.3	74.9	76.5	78.3	15



© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, November 26
data subject to change